

# **R44** RAVEN II & CLIPPER II

## **SPECIFICATIONS**

| Helicopter  | Raven II  | Clipper II with pop-out floats                  |
|---|---|---|
| Engine  | Lycoming IO-540, six cylinder,<br>fuel injected | Lycoming IO-540, six cylinder,<br>fuel injected |
| Horsepower  | Derated to 245 for takeoff and 205 continuous   | Derated to 245 for takeoff and 205 continuous   |
| Maximum Gross Weight  | 2500 lb (1134 kg)                               | 2500 lb (1134 kg)                               |
| Approximate Empty Weight<br>(incl. oil & standard avionics) | 1505 lb (683 kg)                                | 1570 lb (712 kg)                                |
| Standard Fuel (29.5 gal)                                    | 177 lb (80 kg)                                  | 177 lb (80 kg)                                  |
| Auxiliary Fuel (17.0 gal)                                   | 102 lb (46 kg)                                  | 102 lb (46 kg)                                  |
| Pilot, Passengers, and Bag-<br>gage (with standard fuel)    | 818 lb (371 kg)                                 | 753 lb (342 kg)                                 |
| Cruise Speed at Maximum<br>Gross Weight                     | up to 109 kts (202 km/h)                        | up to 106 kts (196 km/h)                        |
| Maximum Range (no reserve)                                  | approx 300 nm (550 km)                          | approx 300 nm (550 km)                          |
| Hover Ceiling IGE   | 8950 ft @ 2500 lb                               | 8950 ft @ 2500 lb                               |
| Hover Ceiling OGE   | 7500 ft @ 2300 lb                               | 7500 ft @ 2300 lb                               |
| Rate of Climb   | over 1000 fpm                                   | over 1000 fpm                                   |
| Maximum Operating Altitude                                  | 14,000 ft                                       | 14,000 ft                                       |
| Electrical System   | 28 volt   | 28 volt   |

## DIMENSIONS



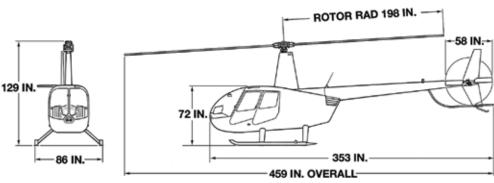

### **STANDARD AVIONICS**

- Eight-hole instrument panel
- Garmin GMA 350Hc audio panel
- Garmin GTR 225B COM radio
- Garmin GTX 335 transponder with ADS-B Out
- Four-place intercom system compatible with standard and Bose stereo headsets

#### **STANDARD INSTRUMENTS**

- Airspeed indicator
- Altimeter
- Rotor/engine dual tachometer
- Manifold pressure gage
- Vertical speed indicator
- Magnetic compass
- Cylinder head temperature gage
- Oil temperature and pressure gages
- Fuel gages
- Ammeter
- Digital OAT gage/voltmeter
- Hourmeter
- Quartz clock

#### **STANDARD EQUIPMENT**

- Hydraulically boosted controls
- RPM governor
- Throttle correlator
- Engine overspeed protection during starting
- Crashworthy fuel system with bladder tanks
- Engine oil filter and quick drain
- Cabin heater and defogger
- Carbon monoxide detector
- Rotor brake
- Intercom switches
- Avionics master switch
- Tinted windows
- Fabric velour seats
- Three-point shoulder harnesses
- Pilot-side adjustable pedals
- Sound damping headliner
- Underseat storage compartments
- Belly hardpoint
- LED anti-collision and navigation lights
- Dual HID landing lights
- LED panel and map lights
- Tow cart adapter
- Ground handling wheels
- Rotor blade tie downs
- Windshield cover
- Travel bag

ROBINSON HELICOPTER COMPANY 2901 Airport Drive • Torrance, CA • 90505 • USA Phone: 310-539-0508 • Fax: 310-539-5198 www.robinsonheli.com

© Robinson Helicopter Company. Robinson and R44 are registered trademarks of Robinson Helicopter Company. Jan. 2020